



Kitchen Luminaire, surface 2x18W/2x36W



KLP 61

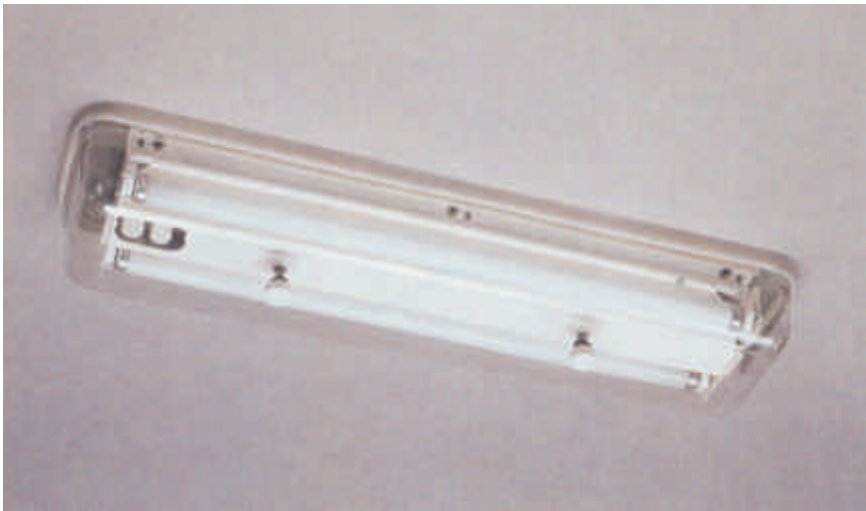

IP 55

**230V
50Hz**

G13




Type	Light source	Light source power / lamp base	Weight
KLP 61 - 2180	fluorescent lamp	2 x 18 W / G 13	4,6 kg
KLP 61 - 2360		2 x 36 W / G 13	6,7 kg


Application
galleys, kitchen, pantries, provision rooms
Approvals
according to the rules of relevant classification societies, additional IEC
Baseplate
stainless steel

Diffuser
polycarbonate, clear
Gasket
silicone rubber
Lamps (not included)
fluorescent lamp 18W / 36W
Electric
flexible wiring, heat resistant up to +105°C

Cable entry
2 plastic cable glands M 20, cable max \varnothing 12 mm
Mounting
6 or 8 mounting holes, \varnothing 5 mm
Electrical connection
see finish section

2.08

[mm]

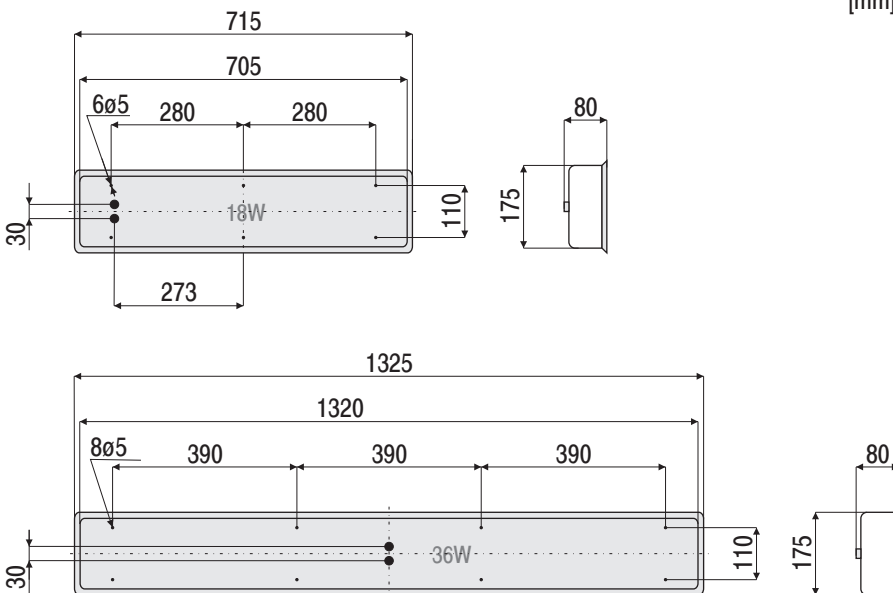

OPTIONS

**220V
60Hz**

**230V
60Hz**

**120V
60Hz**

**240V
50Hz**

24V DC


Electronic Ballast

220V-240V
50Hz-60Hz


220V-240V
DC

Battery Backup System

220V-240V
50Hz-60Hz

1h or 3h

Order Specification

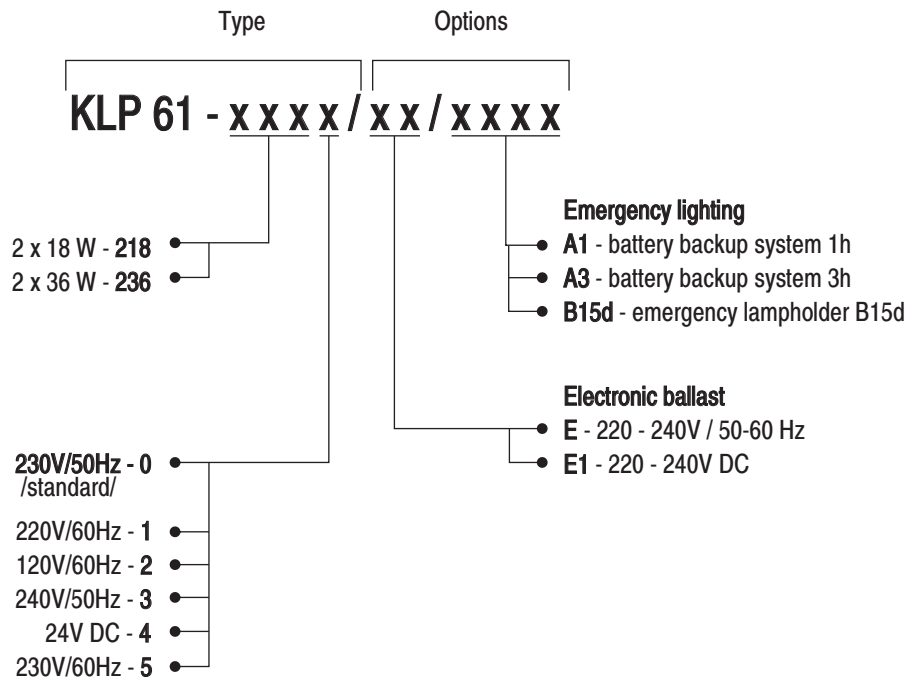

Example of type description

KLP 61 - 2360 light fitting for two fluorescent lamp 36W with socket G13; supply voltage 230V/50Hz;

2.09

Spare parts for kitchen luminaire KLP 61 - 2180

No.	Spare parts	Part-no.
1	Diffuser PC	101 00 61218
2	Diffuser mounting kit	302 00 61218
3	Silicone gasket	601 00 61218
4	Lampholder G 13 /4 pcs./	014 00 61218
5	Ballast /2 pcs./	032 00 61218
6	Capacitor	021 00 61218
7	Cable gland /2 pcs./	042 00 61218

Spare parts for kitchen luminaire KLP 61 - 2360

No.	Spare parts	Part-no.
1	Diffuser PC	101 00 61236
2	Diffuser mounting kit	302 00 61236
3	Silicone gasket	601 00 61236
4	Lampholder G 13 /4 pcs./	014 00 61236
5	Ballast /2 pcs./	032 00 61236
6	Capacitor	021 00 61236
7	Cable gland /2 pcs./	042 00 61236